

Transformer Ht Coil Winding Machine Lv Coil Winding Machine Transformer Winding Machine

Basic Information

Place of Origin: ChinaBrand Name: JC

Certification: SGS CE,UL
Model Number: 90Q6
Minimum Order Quantity: 1 pcs
Price: consult

Packaging Details: Export standard packaging

• Delivery Time: 5 days

Payment Terms:
 L/C, T/T, Western Union, MoneyGram

Supply Ability: 100pcs/month



Product Specification

Voltage: 220VWarranty: 3 YearsAfter-sales Service: 3 Years

Wire Specification: Enameled WireOuter Diameter Of Wire ≤ 600mm

Coil:

Axial Height Of Coil: ≤ 800mm

Coil Form: Circular, Oblong, Elliptical, Rectangular

Control System: PLCPower Consumption: 2.2KW

Power Supply: AC380V/50Hz

Product Name: Transformer Winding Machine

Winding Angle: 0-360°
Winding Direction: Left/Right
Winding Pitch: 0-999mm



More Images







Product Description

Amorphous (silicon steel) triangular core high and low pressure integrated automatic winding machine

USAGES:

The utility model relates to an automatic and intelligent multi-function winding product which is specially used for winding the core coil of amorphous (silicon steel) triangular coiling core transformer. Suitable for 50KVA-630KVA amorphous (silicon steel) triangular coil core transformer low-voltage foil coil and high-voltage coil production.





Basic Info.

Model NO.	JC-1
Outer Diameter of Wire Coil	< 600mm
Transport Package	Wooden
Trademark	JC
HS Code	847981100

Model/Parameter	Jc-800
Purpose	Suitable for Winding Circular
Specification	900*900*900
Origin	China
Production Capacity	60000PCS/Year

Product Description

Purpose:

This equipment is suitable for winding circular, elliptical, oblong, rectangular power transformers, transformers, reactances.

The control part of the device coil adopts a PLC and servo motor system, which has a high level of automation and is particularly suitable for the winding production of amorphous high-voltage coils.

Model/Parameter: JC-800

Outer diameter of wire coil: ≤ 600mm

Axial height of coil: ≤ 800mm

Coil form: circular, oblong, elliptical, rectangular

Wire specification: enameled wire (Φ 0.3 to Φ 4mm), flat wire \leq 3x12mm

Payoff rack: double ended flat wire and a set of round wires


Payoff frame material bearing shaft: Φ 36x450mm

Winding speed: 0-280r/min

Total power: 5KW Single Layer Foil Winding Machine for 10 to 11ookv Insulators

Related products



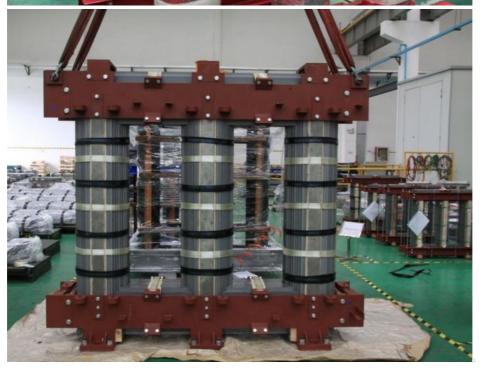







Wuxi Jiachen Power Electronics Equipment Co., Ltd.





tangliang@jc-cores.com



jc-transformer.com

No. 68, Zhounan Road, Wanshi Town, Yixing City, Jiangsu Province, China