



Copper Power Transformer Coil Winding Machine With Payoff Rack Hv Coil Winding Machine

Our Product Introduction

for more products please visit us on jc-transformer.com

Basic Information

- Place of Origin: China
- Brand Name: JC
- Certification: SGS CE,UL
- Model Number: 90Q0
- Minimum Order Quantity: 1 pcs
- Price: consult
- Packaging Details: Export standard packaging
- Delivery Time: 5 days
- Payment Terms: L/C, T/T, Western Union, MoneyGram
- Supply Ability: 100pcs/month






Product Specification

- Winding Mode: Manual/Automatic
- Dimension: 1500*1000*1300mm
- Display: LCD
- Power: 1.5KW
- Type: Transformer Winding Machine
- Voltage: 220V
- Winding Capacity: 1-3KVA
- Coil Diameter: 50-200mm
- Operation Mode: Automatic
- Power Consumption: 2KW
- Speed: 0-100rpm
- Highlight: power transformer coil winding machine, transformer copper winding machine, hv coil winding machine



More Images

10KV 非晶合金变压器技术参数表				
序号	项目	单位	1411-1000	1411-1000
1	额定容量	KVA	1411	1411
2	额定电压	kV	10	10
3	额定电流	A	80	80
4	额定功率	W	1411	1411
5	额定功率因数		0.85	0.85
6	额定效率	%	98.5	98.5
7	额定损耗	W	1411	1411
8	额定温升	K	65	65
9	额定寿命	h	10000	10000





Our Product

Product Description

DRX Horizontal Winding Machine with Payoff Rack for Winding Production of Amorphous High-Voltage Coils

Amorphous body Assembly for non-crystalline alloy iron core transformer (referred to as non-gold) active part Assembly and special equipment, can meet a variety of foil-immersed and dry-type amorphous Assembly. It has changed the traditional suit of technology for the manufacture of distribution transformer and winding the lifting platform placed in the Assembly in advance, the winding axis horizontal, each wearing a single box cores into the winding holes. And core Assembly stage is complete closure, wound closed, the body of insulated Assembly, clamp fastening processes. In the process, the Assembly height can easily adjust the position to meet Assembly requirements of the different working steps. This equipment movement using hydraulic systems, with smooth movements, easy to adjust, the advantage of ample power. Hydraulic system of lifting mechanism of the Assembly include: pumps, motors, valves, to combine mod- ules ensure high

reliability, low noise. Set a large lifting platforms to meet various support bodies, sliding devices necessary for space. Same time, allows sufficient redundancy and facilitate support operations. Slide the left and right table move pulley drive, load bearing capacity, easy operation, accurate positioning. Material can be used for lifting tuning, adjusting range of 50mm, can satisfy the requirement. Plane bearing is fine-tuning settings, reduce overload adjust the intensity of operations. Fixed platform in front set screw under the drive mechanism, fixed platform, back through the crank handle operation. Platform into the work position, flipping the handle to lock the platform. Assembly on the left and right are set to help locate bodies, pressed against the body of the length of the sides of windings, iron core, with safety function. Using screw driving structure, a single pressure on the Organization of effective stroke- 500mm. Electrical parts are brand and high reliability.

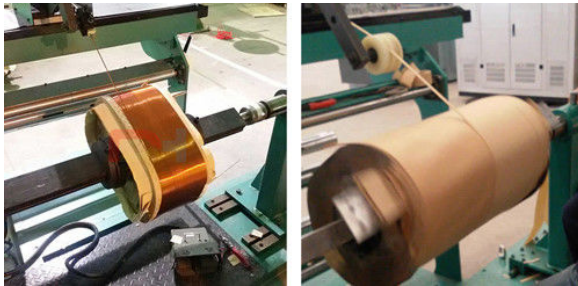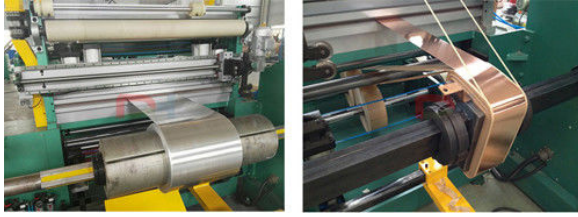



Purpose:

This equipment is suitable for winding circular, elliptical, oblong, rectangular power transformers, transformers, reactances. The control part of the device coil adopts a PLC and servo motor system, which has a high level of automation and is particularly suitable for the winding production of amorphous high-voltage coils.
Model/Parameter: JC-800

Outer diameter of wire coil: $\leq 600\text{mm}$

Axial height of coil: $\leq 800\text{mm}$

Coil form: circular, oblong, elliptical, rectangular

Wire specification: enameled wire($\Phi 0.3$ to $\Phi 4\text{mm}$), flat wire $\leq 3 \times 12\text{mm}$

Payoff rack: double ended flat wire and a set of round wires

Payoff frame material bearing shaft: $\Phi 36 \times 450\text{mm}$

Winding speed: 0-280r/min

Total power: 5KW

Dhr-4 Type Winding Machine Discharge Rack (single head)

Related products

Dhr-4 Type Winding Machine Discharge Rack (single head)
Dhr-4 Type Winding Machine Discharge Rack (single head)
Dhr-4 Type Winding Machine Discharge Rack (single head)
Dhr-4 Type Winding Machine Discharge Rack (single head)
Dhr-4 Type Winding Machine Discharge Rack (single head)
Dhr-4 Type Winding Machine Discharge Rack (single head)


MY COMPANY:

Main products (suitable for new energy): Foil winding machine, automatic high pressure winding machine, triangular three-dimensional core foil winding machine, amorphous triangular three-dimensional core high and low pressure integrated automatic winding

machine, triangular three-dimensional coiling core (silicon steel, amorphous) slitting and winding machine and other transformer special production equipment; Amorphous triangular coil core, etc

11 invention patents, utility model patents and software Copyrights

Amorphous body Assembly for non-crystalline alloy iron core transformer (referred to as non-gold) activepart Assembly and special equipment, can meet a variety of foil-immersed and dry-type amorphous Assembly. It has changed the traditional suit of technology for the manufacture of distribution transformer and winding the lifting platform placed in the Assembly in advance, the winding axis horizontal, each wearing a single box cores into the winding holes. And core Assembly stage is complete closure, wound closed, the body of insulated Assembly, clamp fastening processes. In the process, the Assembly height can easily adjust the position to meet Assembly requirements of the different working steps. This equipment movement using hydraulic systems, with smooth movements, easy to adjust, the advantage of ample power. Hydraulic system of lifting mechanism of the Assembly include: pumps, motors, valves, to combine mod- ules ensure high reliability, low noise. Set a large lifting platforms to meet various support bodies, sliding de- vices necessary for space. Same time, allows sufficient redundancy and facilitate support operations. Slide the left and right table move pulley drive, load bearing capacity, easy operation, accurate positioning. Material can be used for lifting tuning, adjusting range of 50mm, can satisfy the requirement. Plane bearing is fine-tuning settings, reduce overload adjust the intensity of operations. Fixed platform in front set screw under the drive mechanism, fixed platform, back through the crank handle operation. Platform into the work position, flipping the handle to lock the platform. Assembly on the left and right are set to help locate bodies, pressed against the body of the length of the sides of windings, iron core, with safety function. Using screw driving structure, a single pressure on the Organization of effective stroke- 500mm. Electrical parts are brand and high reliability.

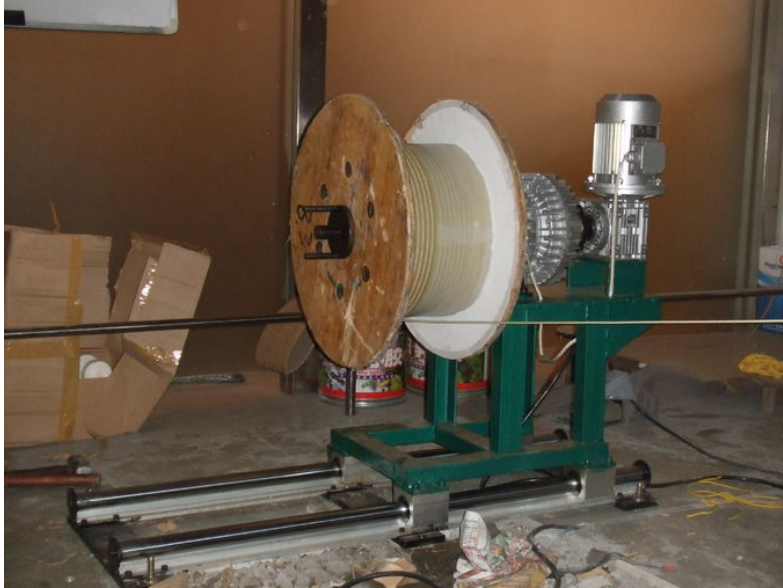



chine



Wuxi Jiachen Power Electronics Equipment Co., Ltd.



tangliang@jc-cores.com



jc-transformer.com

No. 68, Zhounan Road, Wanshi Town, Yixing City, Jiangsu Province, China

