



10KVA Transformer Wound Core For Single Phase Transformer 3D Shape

Our Product Introduction

for more products please visit us on jc-transformer.com


Basic Information

- Place of Origin: China
- Brand Name: Jiachen
- Certification: SGS CE,UL
- Model Number: D10
- Minimum Order Quantity: 5000kg
- Price: consult
- Packaging Details: Standard Export Package
- Delivery Time: 5 days
- Payment Terms: L/C, T/T, Western Union, MoneyGram
- Supply Ability: 5000mt/Month



Product Specification

- Application: Power, Electronic
- Phase: Single
- Core: Shell-type Transformer
- Cooling Method: Oil-immersed Type Transformer
- Winding Type: Multi-winding Transformer
- Certification: ISO9001-2000, ISO9001
- Application: Power Supply
- Coil Form: Cylindrical
- Coil Number: Single Coil
- Coil Type: Toroidal
- Color: Black
- Core Size: Customized
- Frequency: 50/60Hz
- Insulation: Varnish
- Material: Silicon Steel

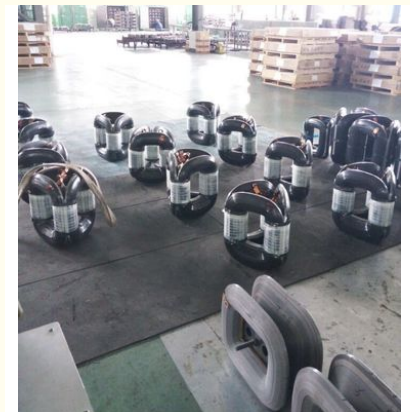

More Images



Product Description

10KVA Wound Core for Single-phase Transformer,3D Shape

Basic Info.

Model NO.	10KVA	Usage	Single-phase Transformer, Rectifier Transformer, Combined Transformer, Power Transformer, Distribution Transformer
Frequency Characteristics	Power Frequency	Shape of Core	Wound Cores
Brand	Jc Cores	Product Description	
Specification	10kVA	Transport Package	Standard Export Package for Ocean Transportation
HS Code	8504901900	Origin	Wuxi. China
		Production Capacity	500mt/Month

Introduction:

Our wound cores are widely used in distribution transformers, especially for S13 type energy-saving transformers in China; we could also provide our customers with single phase wound cores like D9, D10, D11 etc., three phase wound cores; The capacity range from 10KVA to 2500KVA; Due to its particular technology craft, its performance is better than traditional stacked cores, especially for pole-mounted single phase transformers.

Manufacturing requirements:

Tolerance: See demonstrated graphic; the specified requirements should be coincide with customers drawings;

Material: we could choose Nippon steel, Baosteel, WISCO and other steel plants products to meet customers core loss requirements; in order to make sure we choose the right material, we would like our customers to provide us with detailed drawings including necessary technical parameters.

Detailed ordering instructions below:

- 1, All sizes in the pictures?
- 2, Frequency (50Hz or 60Hz)?
- 3, Low voltage;
- 4, Turns (@ low voltage)
- 5, Max. No-load core losses?





**Introduction:**

Our wound cores are widely used in distribution transformers, especially for S13 type energy-saving transformers in China; we could also provide our customers with single phase wound cores like D9, D10, D11 etc., three phase wound cores; The capacity range from 10KVA to 2500KVA; Due to its particular technology craft, its performance is better than traditional stacked cores, especially for pole-mounted single phase transformer.






Manufacturing requirements:

Tolerance: See demonstrated graphic; the specified requirements should be coincide with customers drawings;

Material: we could choose Nippon steel, Baosteel, WISCO and other steel plants products to meet customers core loss requirements; in order to make sure we choose the right material, we would like our customers to provide us with detailed drawings including necessary technical parameters.



Usually, we use 0.18mm, 0.20mm, 0.23mm, 0.27mm, 0.30mm material.

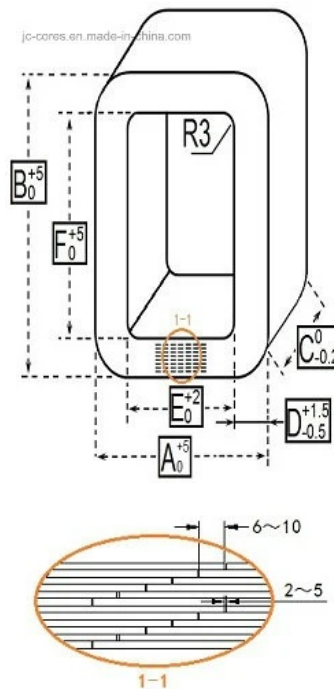

Advantages:

- (1). Lower core loss;
- (2). Less noiseness;
- (3). Sound Short-Circuit Resistant

Product Show:

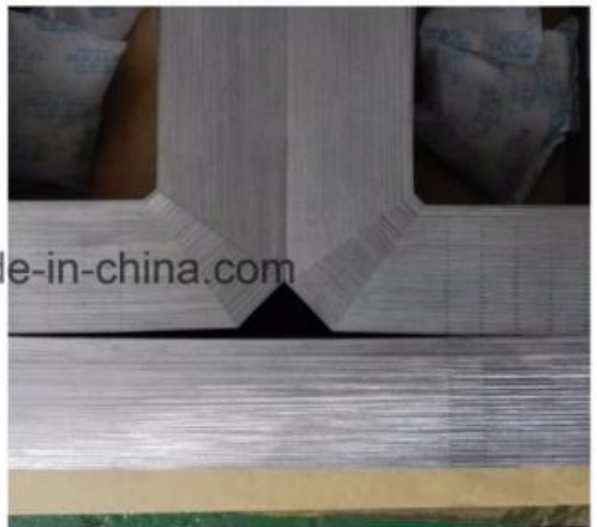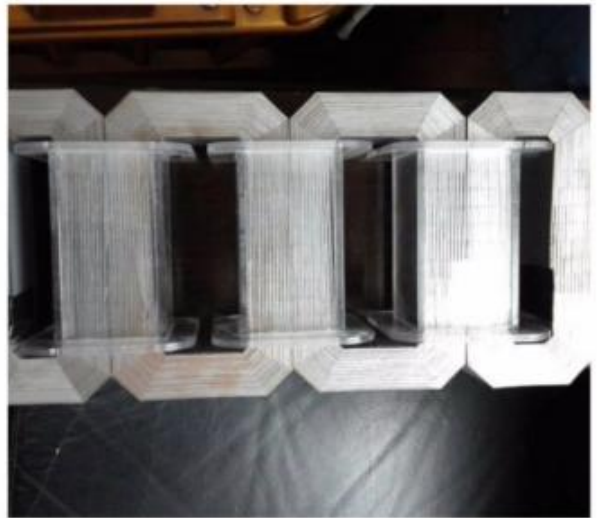

Wuxi Jiachen Power Electronics Equipment Co., Ltd.



tangliang@jc-cores.com



jc-transformer.com

No. 68, Zhounan Road, Wanshi Town, Yixing City, Jiangsu Province, China